

ESD 16/2.4 I

Percussion Diamond Core Drill

Rated Voltage (V)	: 230
Power Input (W)	: 1100
Frequency :	: 50 - 60 Hz
Max. Drilling Diameter (mm)	: 162 (Brickwork)
Spindle Connection	: 1/2"
No Load Speed (RPM)	: 1500/2800
Rated Speed (RPM)	: 0-1100 / 0-2050
Weight (Kg)	: 3.2



EPF 1503

Scouring Machine

Power Input (W)	: 1500
Rated Voltage (V)	: 230
Rated Speed (RPM)	: 4000
Milling Head (mm)	: 140
Depth Adjustment (mm)	: 0.5 - 4.0
Spindle Connection	: M 14 Male
Weight (Kg)	: 3.9



UKF 1500

Bevelling Machine

Power Input (W)	: 1500
No Load Speed (RPM)	: 6000
Max Bevel Height (mm)	: 0 to 6
Chamfer Angle	: 45°
Min. Dia. for Inside Bevel (mm)	: 20mm
Weight (Kg.)	: 4.6



KDB 350

Diamond Core Drilling Unit

Power Input (W)	: 3000
Rated Voltage (V)	: 230
Rated Speed (RPM)	: 230/500/1030
Drilling Diameter (mm)	: 42-352
Spindle Connection	: 1 1/4" Male
Column Length (mm)	: 995
Hub (mm)	: 620
Weight Drilling Unit (Kg)	: 35.0



EZR 22 R R/L SET

Contra Twin Stirrer

Power Input (W)	: 1300
Rated Voltage (V)	: 230
Rated Speed (RPM)	: 140 - 400
Total Diameter Rods (mm)	: 220
Spindle Connection	: Special
Weight (Kg)	: 6.7



AUTOMIX 1801

The Mobile Mixing Station

Power Input (W)	: 1500
Rated Voltage (V)	: 230
Rated Speed (RPM)	: 50
No Load Speed (RPM)	: 115
Bucket Size	: 65 l
Speed Connection	: M 20 Female
Weight (Kg)	: 26.5



VC 30

Wet & Dry Vacuum Cleaner 30L

Input Power	: 1200 W
Rated Voltage	: 220 V - 240 V
Tank Material	: Stainless Steel
Vacuum	: 17 Kpa
Container Capacity	: 30 L



VC 38

Wet & Dry Vacuum Cleaner 38L Heavy Duty

Input Power	: 1400 W
Rated Voltage	: 220 V - 240 V
Tank Material	: Stainless Steel
Vacuum	: 17 Kpa
Container Capacity	: 38 L




TCT Cutter



Specification :

- Shank Type : Weldon
- Dimension Range : 12mm to 100mm
- Length : 35mm, 50mm, 75mm & 100mm

Blades

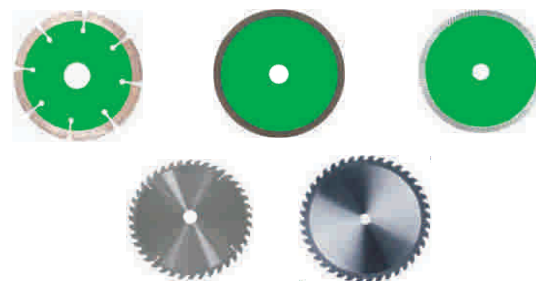

Professional Metal Chuck

Specification :

- 10 mm Chuck 3/8-24UNF Steel Nut
- 10 mm Chuck 1/2-2UNF Steel Nut
- 13 mm Chuck 1/2-20UNF Steel Nut



Concrete Core Bit

- Dimension : Ø 1" to 8"
- Length : 450mm
- Spindle connection : 1 1/4" UNC



Authorised Dealer

Manufactured, Marketed & Serviced By :

EIBENSTOCK
POSITRON

Eibenstock Positron Elektrowerk Pvt. Ltd.

Works : Plot No. 144, 1/2/3, Kallappa Anna Awade
Textile Park, Industrial Estate, Tardal.

Tal. Hatkanangle, Dist. Kolhapur.

Maharashtra (INDIA)

T : +91 7028919491, +91 7028919492


CCO : Suyash Shroff, Office No. 19, 3rd Floor,
Sr. No. 74+75/2/1, Baner Raod, Baner,
Pune - 411045. Maharashtra (India)

E-mail : sales@eibenstock.in

Website : www.ep-india.in



EIBENSTOCK
POSITRON

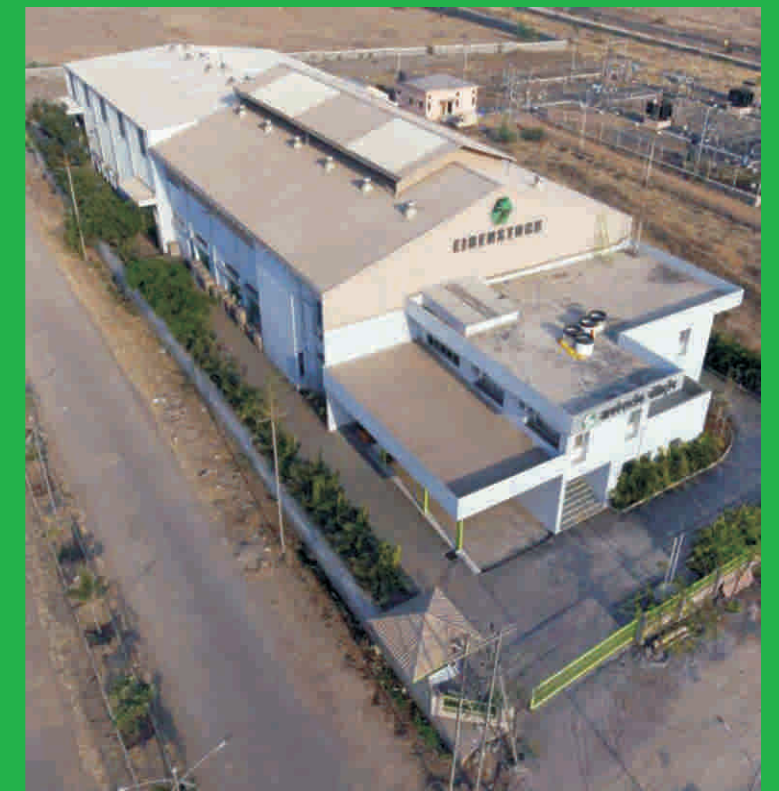

CATALOGUE

GERMAN ENGINEERING

मेड इन इंडिया

KBM 35I

Magnetic Core Drilling Machine

Input supply voltage (V)	: 220-240
Motor Input (W)	: 900
Core Cutting Capacity (mm)	: 12 to 35
Core Cutting Depth (mm)	: 50
Rated speed (rpm)	: 400
Twist Drill Capacity (mm)	: Ø 10
Weight (Kg)	: 10.5



KBM 38

Magnetic Core Drilling Machine

Input supply voltage (V)	: 220-240
Motor Input (W)	: 900
Core Cutting Capacity (mm)	: 12 to 38
Core Cutting Depth (mm)	: 50
Rated speed (rpm)	: 450
Weight (Kg)	: 10.5



KDS 42

Magnetic Core Drilling Machine

Input supply voltage (V)	: 220-240
Motor Input (W)	: 1152
Core Cutting Capacity (mm)	: 12 - 42
Core Cutting Depth (mm)	: 50
Rated speed (rpm)	: 450 / 250
Twist Drill Capacity (mm)	: Ø 22
Direct Arbor	: 19 mm weldon
Morse Taper	: MT 2
Weight	: 21



KBM 42 - 2

Magnetic Core Drilling Machine

Input supply voltage (V)	: 220-240
Motor Input (W)	: 1100
Core Cutting Capacity (mm)	: 12 to 42
Core Cutting Depth (mm)	: 50
Rated speed (rpm)	: 450 / 250
Weight (Kg)	: 17.5
Twist Drill Capacity (mm)	: 22



KBM 42R/RL

Magnetic Core Drilling Machine

Input supply voltage (V)	: 220-240
Motor Input (W)	: 1150
Core Cutting Capacity (mm)	: 12 - 50
Core Cutting Depth (mm)	: 50
Rated speed (rpm)	: 100-250 / 180-450
Twist Drill Capacity (mm)	: Ø 22
Direct Arbor	: 19 mm weldon
Morse Taper	: MT 2
Weight	: 12.7



KBM 42I

Magnetic Core Drilling Machine

Input supply voltage (V)	: 220-240
Motor Input (W)	: 1150
Core Cutting Capacity (mm)	: 12 - 50
Core Cutting Depth (mm)	: 50
Rated speed (rpm)	: 250 / 450
Twist Drill Capacity (mm)	: Ø 22
Direct Arbor	: 19 mm weldon
Morse Taper	: MT 2
Weight	: 12.5



KBM 50 - 2

Magnetic Core Drilling Machine

Input supply voltage (V)	: 220-240
Motor Input (W)	: 1100
Core Cutting Capacity (mm)	: 12 to 50
Core Cutting Depth (mm)	: 50
Rated speed (rpm)	: 450 / 250
Weight (Kg)	: 17.5



KDS 85-3

Magnetic Core Drilling Machine

Input supply voltage (V)	: 220-240
Motor Input (W)	: 1800
Core Cutting Capacity (mm)	: 85
Core Cutting Depth (mm)	: 75
Rated speed (rpm)	: 110/190/280
Twist Drill Capacity (mm)	: Ø 32
Direct Arbor	: 32 mm weldon
Morse Taper	: MT 3
Weight	: 29



KBM 85-4E REL

Magnetic Core Drilling Machine

Input supply voltage (V)	: 220-240
Motor Input (W)	: 1700
Core Cutting Capacity (mm)	: 85
Core Cutting Depth (mm)	: 75
Rated speed (rpm)	: 385/245/175/110
Direct Arbor	: 32 mm Weldon
Twist Drill Capacity (mm)	: Ø 32
Morse Tapper	: MT3
Weight (Kg)	: 26.5



KDS 100 - 4RL

Magnetic Core Drilling Machine

Input supply voltage (V)	: 220-240
Motor Input (W)	: 1800
Core Cutting Capacity (mm)	: 100
Core Cutting Depth (mm)	: 100
Rated speed (rpm)	: 60-140/200-470
Morse Tapping	: MT3
Tapping Capacity	: up to M 24 mm
Electro Torque Control	: Yes
Thermal Overload Protection	: Yes
Weight (Kg)	: 36



KBM 130

Magnetic Core Drilling Machine

Input supply voltage (V)	: 220-240
Motor Input (W)	: 2300
Cutting Capacity (mm)	: Core Drill Short 12 to 130 : Core Drill Long 12 to 100 : Core Drill Extra long 20 to 120
Core Cutting Depth (mm)	: 110
Rated speed (rpm)	: 30 to 85 min -1 : 50 to 135 min -1 : 130 to 390 min -1 : 210 to 620 min -1
Weight (Kg)	: 50
Tapping Capacity	: up to M42 mm
Electro Torque Control	: Yes
Thermal Overload Protection	: Yes
* Twist drilling : Capacity (Max)	: 45 mm
* Reaming : (Max)	: 50 mm
* Morse taper	: MT 4
* Direct arbor	: 32 mm Weldon



WBM 40

Magnetic Core Drilling Machine

Input supply voltage (V)	: 220-240
Motor Input (W)	: 1300
Core Cutting Capacity (mm)	: 12 - 40
Core Cutting Depth (mm)	: 25
Rated speed (rpm)	: 320
Direct Arbor	: 19 mm weldon
Weight	: 12.1



PDB 200

Diamond Core Drilling Machine

Input Supply Voltage	: 220-240 V
Motor Input	: 2500 W
Core Cutting Capacity	: 200 mm
Stroke	: 490 mm
Rated Speed	: 450 RPM
Machanical Safety Clutch	: Available
Spindle Connection	: 1 1/4" UNC
Weight	: 14 Kg



PDB 250

Diamond Core Drilling Machine

Input Supply Voltage	: 220-240 V
Motor Input	: 2500 W
Core Cutting Capacity	: 250 mm
Stroke	: 500 mm
Rated Speed	: 360 / 850 RPM
Machanical Safety Clutch	: Available
Spindle Connection	: 1 1/4" UNC
Weight	: 24 Kg



EPD 10

Plain Drill

Rated Voltage	: 220-240 V
Power Input	: 650 W
No Load Speed	: 0-1200 min ⁻¹
Drilling Capacity in Steel	: 10 mm
Drilling Capacity in Aluminium	: 13 mm
Drilling Capacity in Wood	: 20 mm
Weight	: 1.8 Kg
Chuck	: 1.5-10 mm



EHD 13-1/13-2

Single / Double Speed Hammer Drill

Rated Voltage	: 220-240 V
Power Input	: 650 W
No Load Speed	: 0-1200/3000 min ⁻¹
Drilling Capacity in Concrete	: 13/15 mm
Drilling Capacity in Brick & Tile	: 13/15 mm
Drilling Capacity in Steel	: 10/13 mm
Drilling Capacity in Aluminium	: 15 mm
Drilling Capacity in Wood	: 30 mm
Weight	: 1.9 / 2.1 Kg
Chuck	: 1.5-13 mm



EBH-2-18 RE

Rotary Hammer Drill 18 mm

Rated Voltage	: 230 V
Power Input	: 650 W
No Load Speed	: 0-1600 RPM
Drilling Capacity in Concrete	: 18mm
Drilling Capacity in Steel	: 13mm
Drilling Capacity in Wood	: 20mm
Weight	: 2.1 Kg



EZW 125 I

Angel Grinder 125 mm

Rated Voltage (V)	: 220 - 240
Power Input (W)	: 1400
No Load Speed (RPM)	: 11,000
Grinding Disk Diameter (mm)	: 125
Thread of Work Spindle	: M 14
Weight (Kg.)	: 3.1



EB5 125 I

Concrete Grinder 125 mm

Rated Voltage (V)	: 220 - 240
Power Input (W)	: 1400
No Load Speed (RPM)	: 9,500
Grinding Disk Diameter (mm)	: 125
Thread of Work Spindle	: M 14
Weight (Kg.)	: 3.2



EZW 100

Angle Grinder

Power Input (W)	: 750
Rated Voltage	: 230-240 V
No Load Speed (RPM)	: 12,000
Max Disc (mm)	: 100
Weight (Kg.)	: 2.1



EST 355 I

Chop Saw

Rated Voltage (V)	: 220 - 240
Power Input (W)	: 2300
No Load Speed (RPM)	: 4000
Cut off Wheel Diameter (mm)	: 355
Weight (Kg.)	: 17



ETC 125 E1 & E2

Super Cutter Machine

Rated Voltage (V)	: 220 - 240
Power Input (W)	: 1250
No Load Speed (RPM)	: 12,500
Max Disc Diameter (mm)	: 125
Max Cutting Depth (mm)	: 39.5
Bevel Cutting Angle	: 0 - 45°
Weight (Kg.)	: 2.9



EB 600

Electric Air Blower 600W

Input Power	: 600 W
Rated Voltage	: 220 V - 240 V
No Load Speed	: 16000 rpm
Air Volume	: 4.0 m³/min
Weight (Kg.)	: 1.6



MXT 100/100-2

The Versatile Stirrer up to 50 kg

Rated Voltage	: 220-240 V
Power Input	: 1100 W
Rated Speed	: 0 - 580 / 0 - 230 / 0 - 410 rpm
Max. Basket Diameter	: 140 mm
Spindle Connection	: M 14 i
Weight (Kg.)	: 4 / 4.5

